


PROFILES


DOUBLE RABBET



SINGLE RABBET




CASED OPEN




DOUBLE EGRESS




HOSPITAL STOP



WELD OPTIONS





FULL WELD




FACE WELD


CORNER SECTION

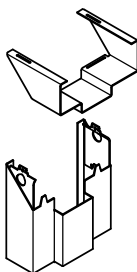

FDJ ANCHORING







COMPRESSION ANCHOR



BASE ANCHOR DIMPLES

HINGE SPACING

OPENING HEIGHT	6'8"			7'0"			7'2"			7'10"			8'0"		
DIMENSION	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
1 3/4" DOOR SPACING	7 1/4"	2@ 30 1/4"	12 1/4"	7 1/4"	2@ 32 1/4"	12 1/4"	7 1/4"	2@ 33 1/4"	12 1/4"	7 1/4"	3@ 25 1/4"	10 1/4"	7 1/4"	3@ 25 1/2"	12 1/4"
1 3/8" DOOR SPACING				6 3/4"	2@ 32 3/4"	11 3/4"	6 3/4"	2@ 33 3/4"	11 3/4"						

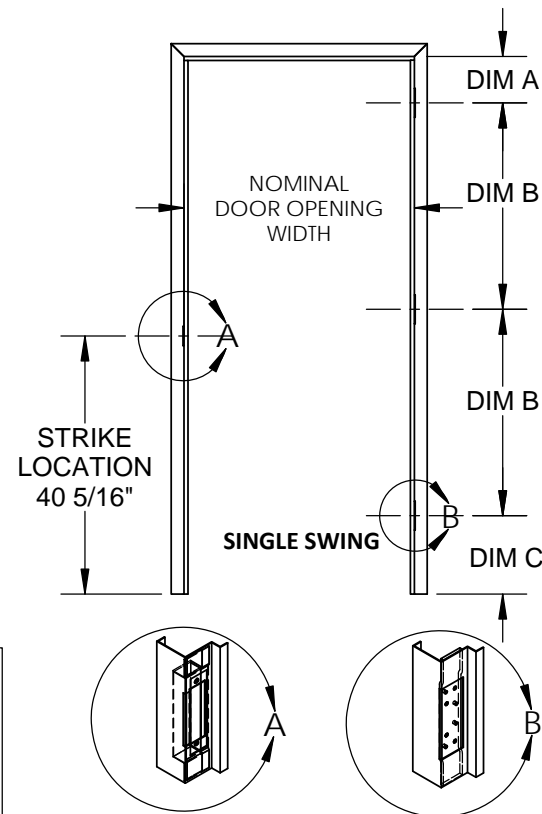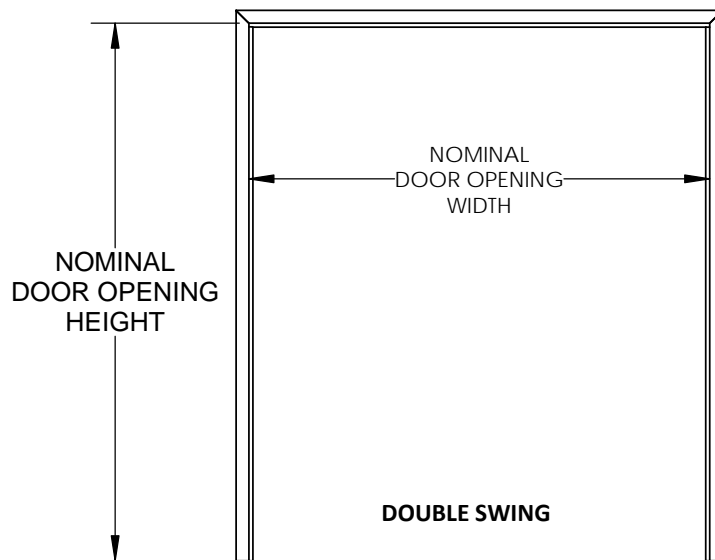

FDJ SERIES FRAMES

FDJ SERIES FRAMES ARE AVAILABLE AS SHOWN FOR THREE SIDED FRAMES OR AS STICK SECTIONS FOR TRANSOMS, SIDELIGHTS AND BORROWED LITE FRAMES.

FOR LABELING DETAILS, ANCHORING OPTIONS, AND DOOR HANDING & SWING, PLEASE SEE THE APPLICABLE SECTION OF THE TECHNICAL DATA MANUAL.



SUB-XX

DRAWN BY _____ DATE _____		ISSUE DATE	REVISIONS	BY
CHECKED _____ DATE _____				
SHT OF	JOB NO.			