




① TOP CHANNELS



② CLOSER REINFORCEMENT



③ VERTICAL EDGE


STANDARD



NVS




④ HINGE PREP




⑤ CORE

FIBER BOARD



⑥ LOCK EDGE

BEVELED EDGE




SQUARE EDGE





⑦ LOCK PREP

FOR LOCK PREPS
SEE DOOR PREP PAGE

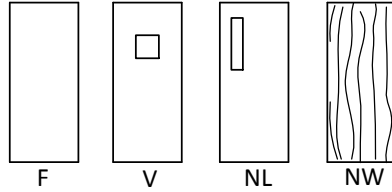

IF A TEMPERATURE RISE DOOR IS DESIRED, THEN ONLY 100 SQUARE INCHES OF GLASS ALLOWED.

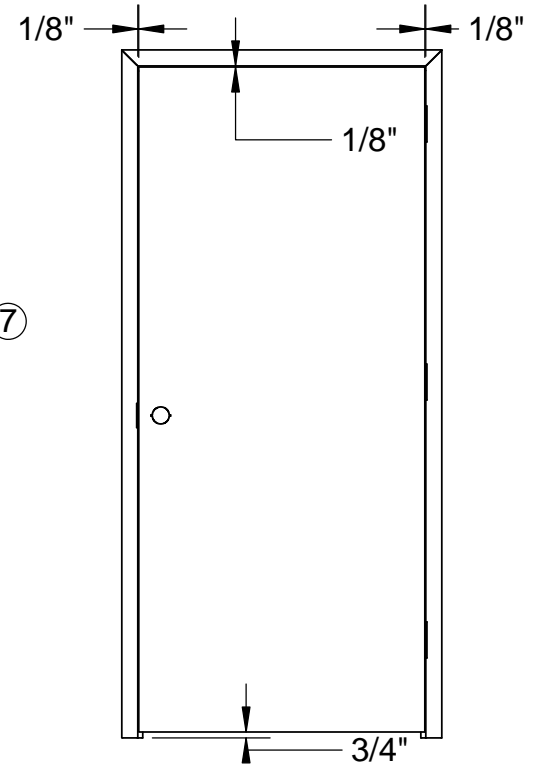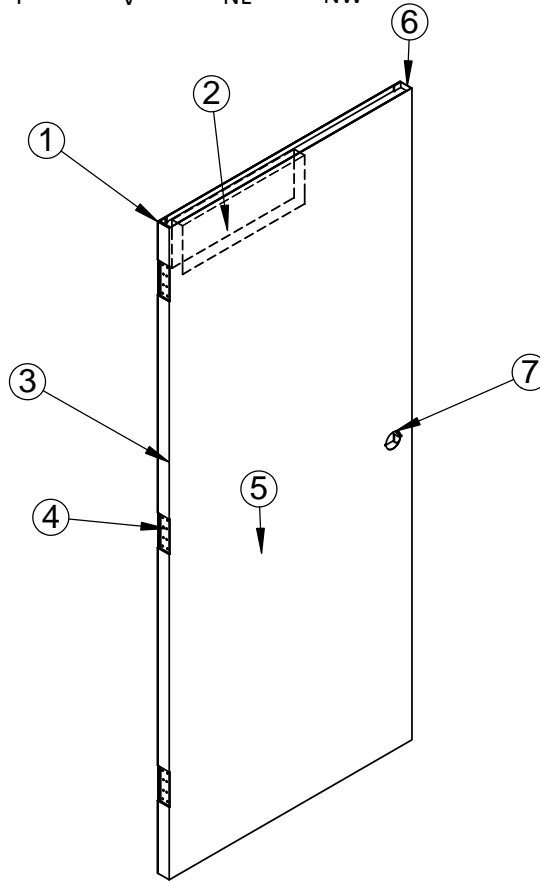

**NF SERIES DOOR
TEMPERATURE RISE (250)**

DOOR MEETS OR EXCEEDS ANSI 250.4 PERFORMANCE TEST:

20 GAUGE STEEL (500,000 CYCLES)

18 & 16 GAUGE STEEL (1,000,000 CYCLES)

DOORS MEET LEED REQUIREMENTS AND BUY AMERICAN STANDARDS.

LABELING AGENCIES:
UNDERWRITES LABORATORY INC.
WARNOCK HERSEY INTL.
FACTORY MUTUAL SYSTEM

AVAILABLE IN:
14, 16, 18, 20
GAUGE
CR, A60



SUB-XX

DRAWN BY _____ DATE _____		ISSUE DATE	REVISIONS	BY
CHECKED _____ DATE _____				
SHT OF	JOB NO.			