




① TOP CHANNELS



② CLOSER REINFORCEMENT



③ VERTICAL EDGE


STANDARD



NVS




④ HINGE PREP



⑤ CORE


POLYSTRENE



⑥ LOCK EDGE BEVELED EDGE



SQUARE EDGE



⑦ LOCK PREP

FOR LOCK PREPS
SEE DOOR PREP PAGE


DOOR MEETS OR EXCEEDS ANSI 250.4
PERFORMANCE TEST:

20 GAUGE STEEL (500,000 CYCLES)


18 & 16 GAUGE STEEL (1,000,000
CYCLES)

DOORS MEET LEED REQUIREMENTS
AND BUY AMERICAN STANDARDS.

LABELING AGENCIES:
UNDERWRITES LABRATORY INC.
WARNOCK HERSEY INTL.
FACTORY MUTUAL SYSTEM

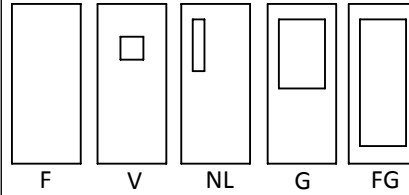

MUST HAVE BULLET RATED GLASS.
GLASS LITE AVAILABLE: 10" X 10" MIN. 28" X 58" MAX
WITH APPROPRIATE GLAZING (BY OTHERS)

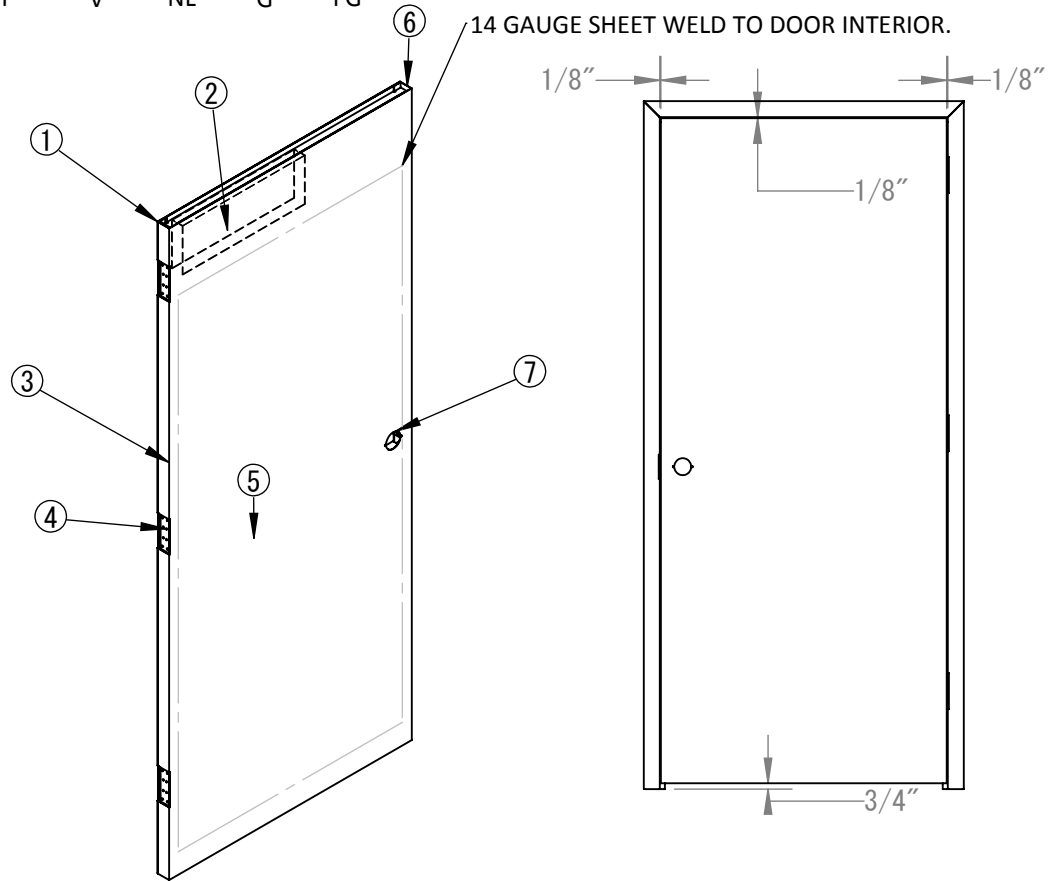

BULLET ASSEMBLY

AVAILABLE IN:
CR, A60, G-90



SUB-7

DRAWN BY _____ DATE _____		ISSUE DATE	REVISIONS	BY
CHECKED _____ DATE _____				
SHT OF	JOB NO.			